




FEATURES



- Shielded construction
- Capable of corresponding high frequency.
- Low loss realized with low R_{DC}
- High performance (sat) realized by metal dust core.
- Ultra low buzz noise, due to composite construction.
- 100% lead(Pb)-free and RoHS compliant.
- AEC-Q200 qualified
- Operating temperature: -55 to +155 °C (including self-temperature rise)
- Quantity: 1000PCS





APPLICATION




- Headlamps, tail lamps and interior lighting
- V
- Doors, window lift and seat control
- Audio subsystem
- Digital instrument cluster
- In-Vehicle Infotainment and navigation




Part No	Inductance @ 100KHz/1V (μ H)	Tolerance	Temperature Rise current Typ. ()	Temperature Rise current Max. ()	Saturation current Typ. ()	Saturation current Max. ()	Resistance Typ. (m Ω)	Resistance Max. (m Ω)
M 7030-R15N	0.15	±30%	30.0	25.0	40.0	36.0	1.70	2.10
M 7030-R22M	0.22	±20%	23.0	21.0	34.0	32.0	2.00	2.50
M 7030-R33M	0.33	±20%	21.0	20.0	25.0	22.0	2.80	3.40
M 7030-R36M	0.36	±20%	20.0	18.0	24.0	21.0	3.30	3.90
M 7030-R47M	0.47	±20%	18.0	16.0	20.0	18.0	3.40	4.00
M 7030-R56M	0.56	±20%	16.5	15.0	18.0	16.0	3.90	4.50
M 7030-R68M	0.68	±20%	16.0	14.5	17.0	15.0	4.70	5.30
M 7030-R82M	0.82	±20%	14.0	13.0	16.0	14.0	5.40	6.00
M 7030-1R0M	1.00	±20%	12.0	11.0	15.0	13.5	6.70	7.40
M 7030-1R2M	1.20	±20%	10.0	9.5	14.0	12.5	7.70	9.50


Tolerance	Satura on urrent Typ. ()	Resistance Typ.
±20%	14.0	10.2
±20%	10.0	13.5
±20%	9.5	19.0
±20%	6.5	28.0
±20%	6.0	39.0
±20%	6.0	43.0
±20%	6.0	54.0
±20%	5.5	62.0
±20%	4.5	110
±20%	3.0	150
±20%	2.5	215
±20%	2.0	318

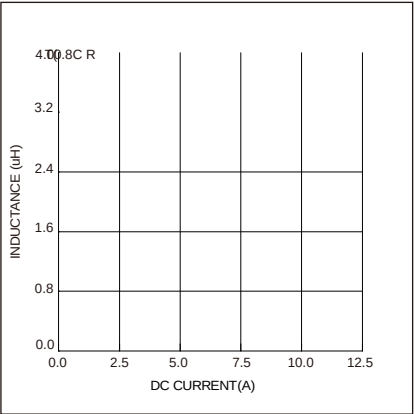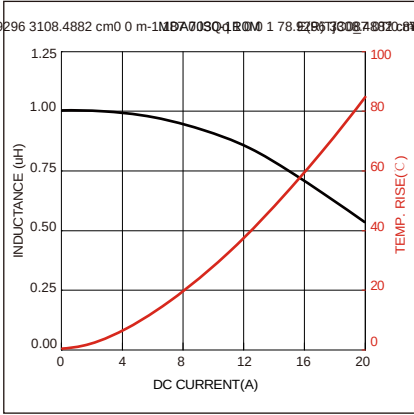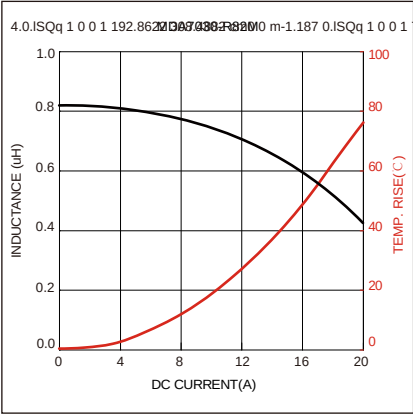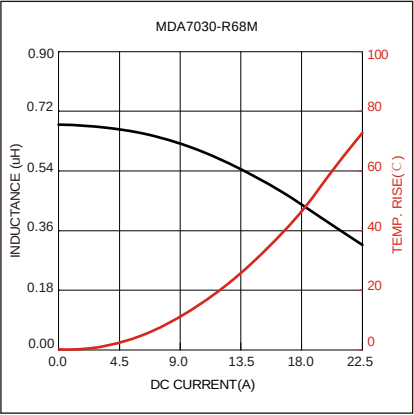

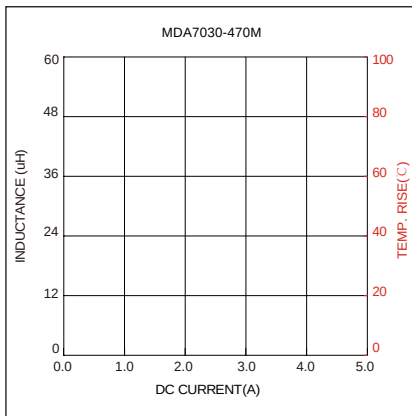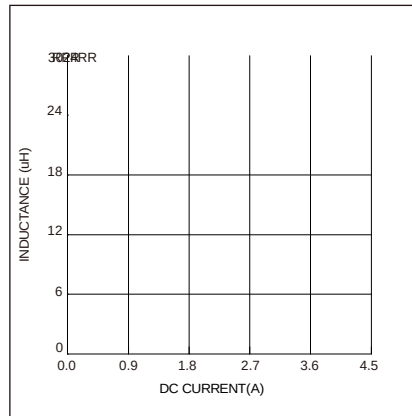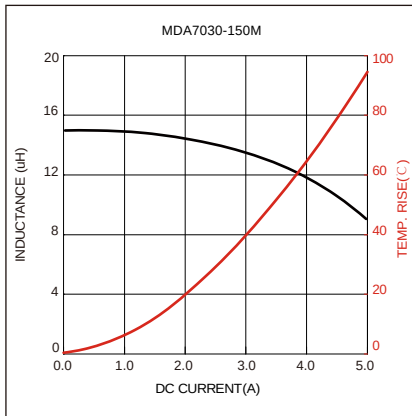





Reel Dimension: [mm]

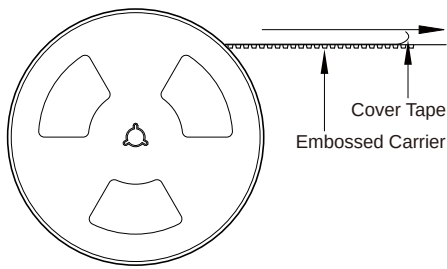

2.2 ± 0.5



Packaging Quantity:



1000 Pcs/Reel

2 Reel /Inner box(2000 Pcs)

3 Inner box/Carton box(6K Pcs)

Cautions and Warnings:

Storage Conditions:

Operation Instructions: