


# MDTA Series

## SMD Low Profile High Current Molded Inductor

### Size 141208

#### FEATURES


- High current, low DCR,
- 
- 
- 
- 
- 




#### APPLICATION

- 
- 
- 
- 
- 
- 

#### Dimensions: [mm]

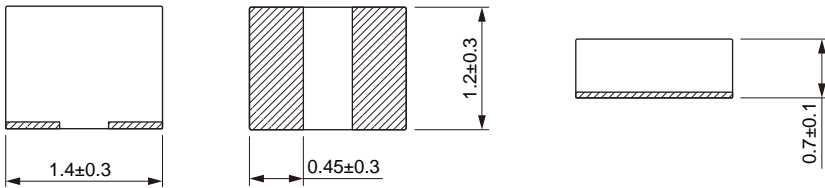

#### Land Pattern: [mm]



#### Electrical Properties:

		±20%						28
MDTA141208-R47M		±20%					29	

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is  $\Delta T=40^{\circ}\text{C}$



## Typical Electrical Characteristics: