

NRSA Series

SMD Power Inductors For Automotive


Size 6028



FEATURES


APPLICATION

Dimensions: [mm]

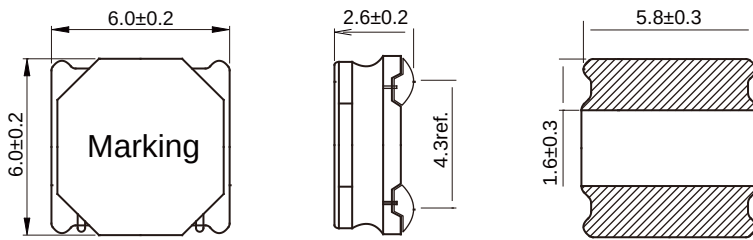



Electrical Properties:


Land Pattern: [mm]



59d

16150 1460 T(0)12746.638 0.8711017159410 14528011001 14528011001 14528011001
--

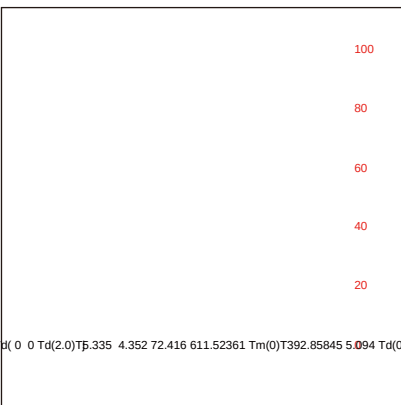

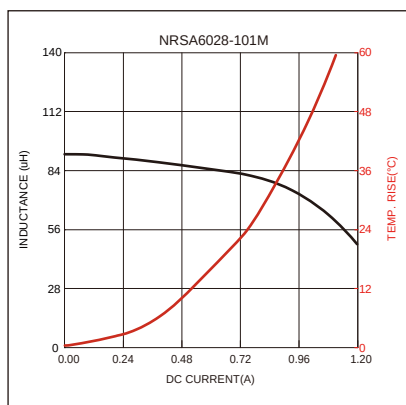


Soldering Reflow:

Preheat condition: 150 ~200℃ / 60~120 sec.
Allowed time above 217℃ : 60~90 sec.
Max temperature: 260℃ .
Allowed Reflow time: 2x max.


Packaging Information:

Tape Dimension :

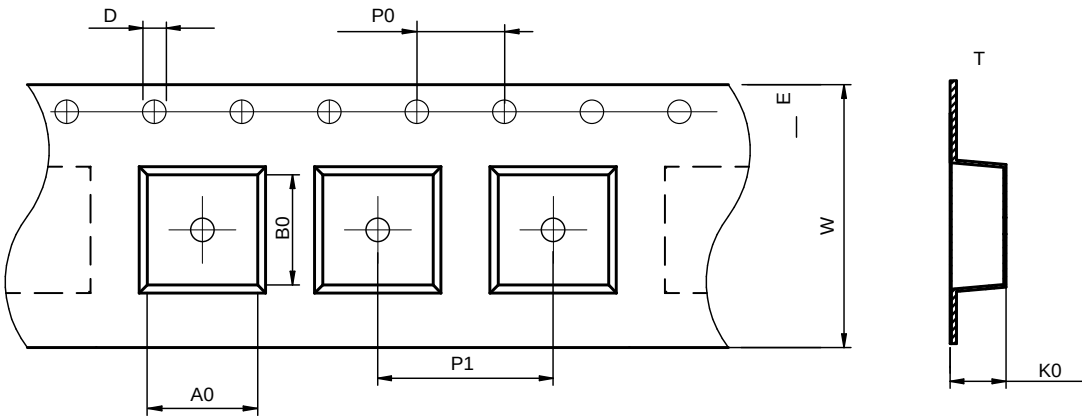

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
NRSA6028	6.4±0.1	6.4±0.1	1.5±0.1	4.0±0.1	8.0±0.1	16.0±0.3	3.3±0.1	1.75±0.1	0.40±0.03


Peel force of top cover tape:

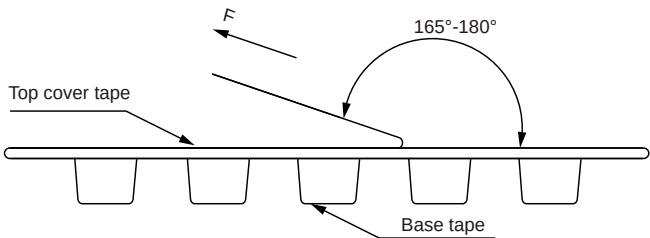

The peel force of top cover tape shall be between 0.3 to 1.17 N



Reel Dimension: [mm]

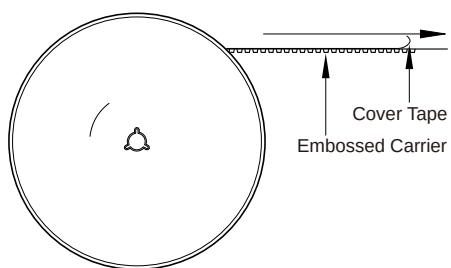

Packaging Quantity: